



Parameters	Symbol	Minimum	Maximum
Total Length	L	254.00	257.00
Threading Length	l	F.T	F.T
Major diameter	D	63.06	63.44
Pitch diameter	D1	61.16	61.36
Minor diameter	D2	59.54	-
Chamfer	u	0.00	12.00
Thread per Inch	TPI	8 UNC	

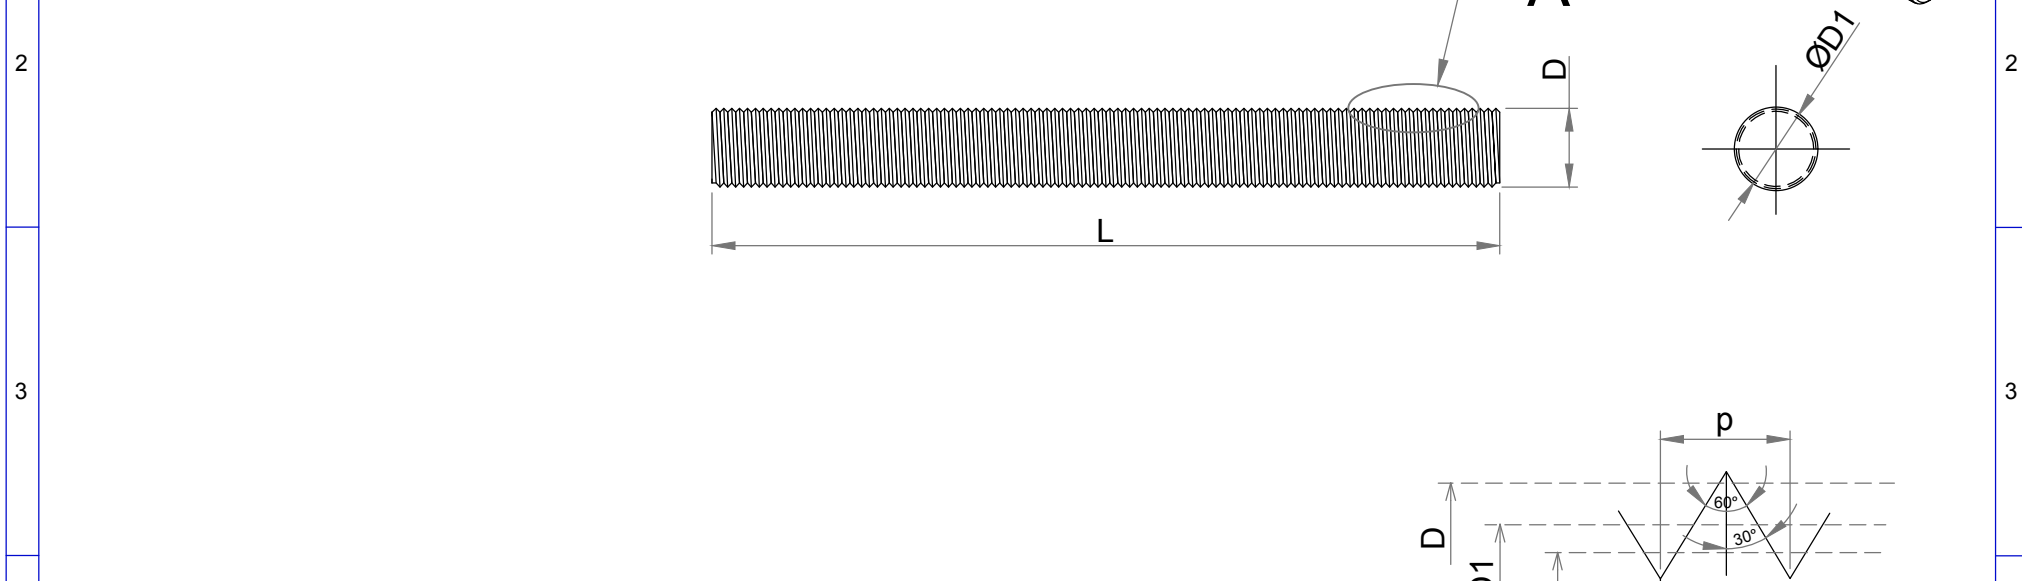

Dimension as per	B 18.1.1
Chemical & Mechanical properties as per	ASTM A193
Thread tolerance class (C)	2A
Grade	B16
Weight	5.75589 kg/piece

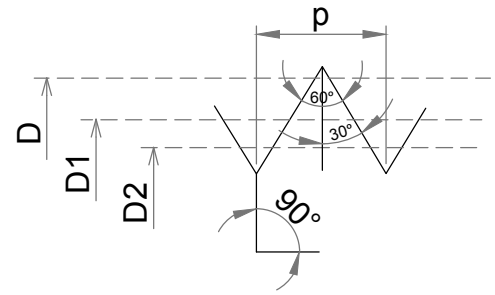

'A' Enlarge View

Drawing Number <b>KE-BASE-2200-00360-B18.1.1-A193-B16-2.1/2x10</b>		SIZE <b>2.1/2"x10"</b>	TITLE <b>Stud Bolt</b>			
AMMENDMENT		Date - 02.08.2018	DIMENSIONS ARE IN MILLIMETERS			Approved By Kapil Aggarwal CEO-MD
DETAILS	REVISION	DATE	<b>APPROVED</b>	<b>ROLL FAST</b> STAINLESS STEEL BOLTS HIGH TENSILE BOLTS PRECISION TURNED COMPONENTS		
<b>REMOVE SHARP EDGES &amp; BURRS</b>	SHEET SIZE <b>A4</b>	SCALE <b>NTS</b>				
FASTENERS FOR WIND ENERGY ANCHOR BOLTS & FOUNDATION BOLTS		<b>KAPIL ENTERPRISES</b>			330 EHTP, HSSIIDC, Kundli Industrial Estate Sonapat-Haryana-131028, Ph:9811009061 Email:-sales@bigboltnut.com, kapil@roll-fast.com	