


A B C D E F


Parameters	Symbol	Minimum	Maximum
Total Length	L	139.70	142.70
Threading Length	l	F.T	F.T
Major diameter	D	37.66	38.04
Pitch diameter	D1	35.80	35.98
Minor diameter	D2	34.15	-
Chamfer	u	0.00	8.00
Thread per Inch	TPI	8 UNC	

1

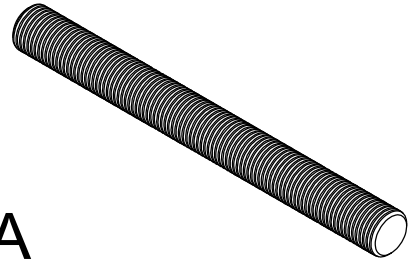


1

2

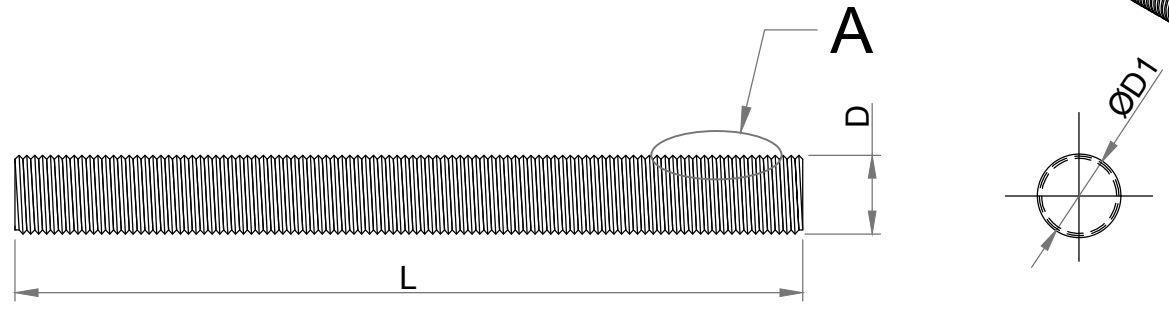

2

3

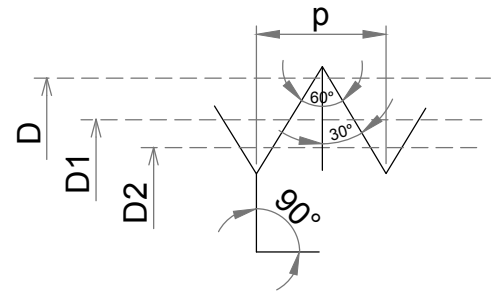

3

Dimension as per	B 18.1.1
Chemical & Mechanical properties as per	ASTM A193
Thread tolerance class (C)	2A
Grade	B7
Weight	1.07272 kg/piece

'A' Enlarge View

4

Drawing Number <b>KE-BASE-2200-00223-B18.1.1-A193-B7-1.1/2x5.1/2</b>		SIZE <b>1.1/2"x5.1/2"</b>	TITLE <b>Stud Bolt</b>			
AMMENDMENT		Date - 02.08.2018	DIMENSIONS ARE IN MILLIMETERS			Approved By Kapil Aggarwal CEO-MD
DETAILS	REVISION	DATE	<b>ROLL FAST</b> STAINLESS STEEL BOLTS HIGH TENSILE BOLTS PRECISION TURNED COMPONENTS	Drawn By Pankaj Kumar (Sr. QC Manager)		
<b>REMOVE SHARP EDGES &amp; BURRS</b>	SHEET SIZE <b>A4</b>	SCALE <b>NTS</b>		Checked BY Approved By Santosh Kumar		
		<b>Big Bolt Nut</b> FASTENERS FOR WIND ENERGY ANCHOR BOLTS & FOUNDATION BOLTS	<b>APPROVED</b>	<b>KAPIL ENTERPRISES</b> 330 EHTP, HSSIIDC, Kundli Industrial Estate Sonapat-Haryana-131028, Ph:9811009061 Email:-sales@bigboltnut.com, kapil@roll-fast.com		

5

5

A B C D E F