



A B C D E F

Parameters	Symbol	Minimum	Maximum
Total Length	L	95.25	98.25
Threading Length	l	F.T	F.T
Major diameter	D	34.3900	34.8700
Pitch diameter	D1	32.6200	32.8100
Minor diameter	D2	30.9700	-
Chamfer	u	0.00	7.00
Thread per Inch	TPI	8 UNC	

1

2

3

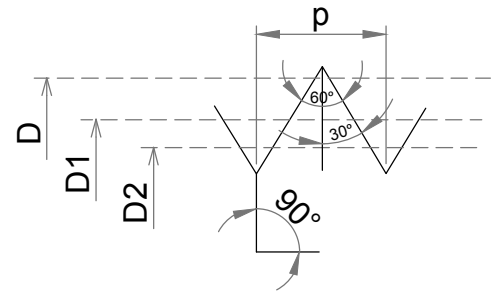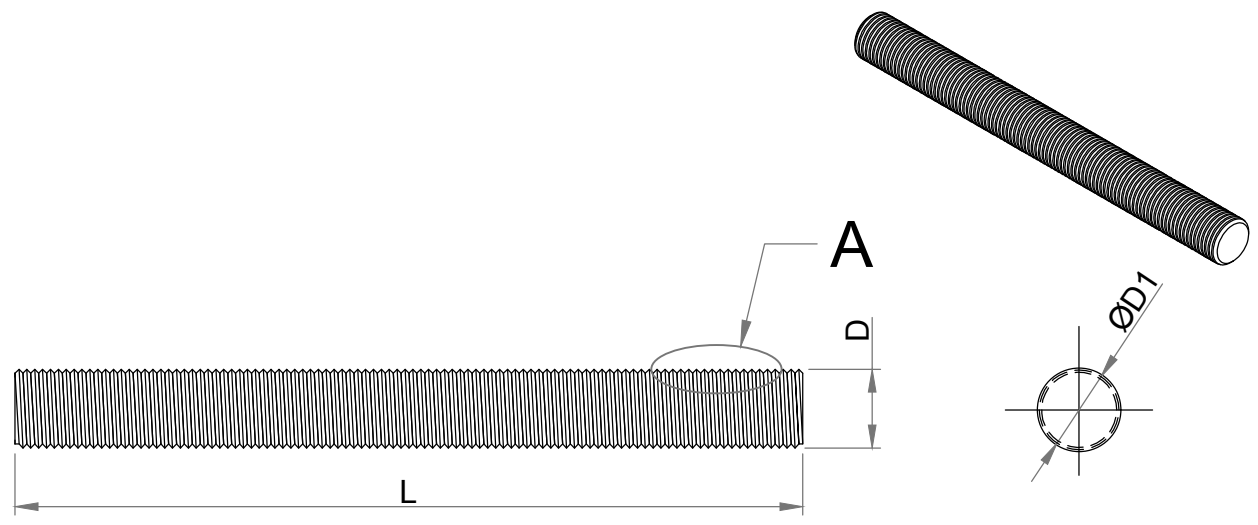

'A' Enlarge View

Dimension as per	B 18.1.1
Chemical & Mechanical properties as per	ASTM A193
Thread tolerance class (C)	2A
Grade	B7M
Weight	0.60104 kg/piece

Drawing Number	KE-BASE-2200-00191-B18.1.1-A193-B7M-1.3/8x3.3/4	SIZE	1.3/8"x3.3/4"	TITLE	Stud Bolt			
----------------	---	------	---------------	-------	-----------	--	--	--

AMMENDMENT			Date - 24.07.2018		DIMENSIONS ARE IN MILLIMETERS		
DETAILS	REVISION	DATE		ROLL FAST STAINLESS STEEL BOLTS HIGH TENSILE BOLTS PRECISION TURNED COMPONENTS	Approved By	Drawn By	Checked BY
REMOVE SHARP EDGES & BURRS	SHEET SIZE A4	SCALE NTS			FASTENERS FOR WIND ENERGY ANCHOR BOLTS & FOUNDATION BOLTS	KAPIL ENTERPRISES 330 EHTP, HSSIIDC, Kundli Industrial Estate Sonapat-Haryana-131028, Ph:9811009061 Email:-sales@bigboltnut.com, kapil@roll-fast.com	Kapil Aggarwal CEO-MD

A B C D E F

1

2

3

4

5