


| Parameters | Symbol | Minimum | Maximum |
|------------------|--------|---------|---------|
| Total Length | L | 266.70 | 269.70 |
| Threading Length | l | F.T | F.T |
| Major diameter | D | 69.4100 | 69.7800 |
| Pitch diameter | D1 | 67.5100 | 67.7200 |
| Minor diameter | D2 | 65.8900 | - |
| Chamfer | u | 0.00 | 13.0000 |
| Thread per Inch | TPI | 8 UNC | |

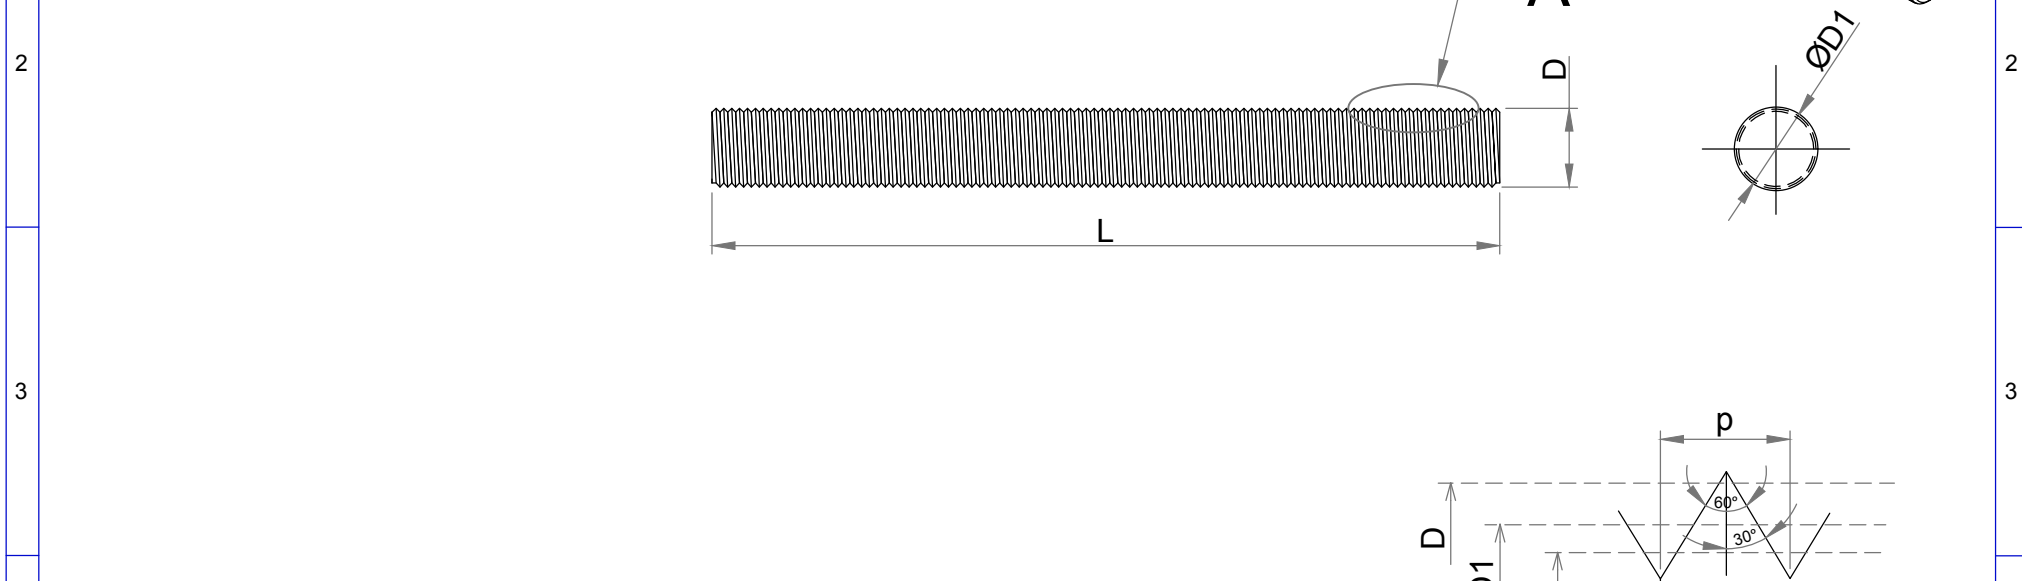

| | |
|---|------------------|
| Dimension as per | B 18.1.1 |
| Chemical & Mechanical properties as per | ASTM A193 |
| Thread tolerance class (C) | 2A |
| Grade | B7M |
| Weight | 7.05091 kg/piece |

| | | | | | | |
|---|-------------------------|-------------------------------|-------------------------------|------------------|---|--|
| Drawing Number KE-BASE-2200-00386-B18.1.1-A193-B7M-2.3/4x10.1/2 | | SIZE 2.3/4"x10.1/2" | TITLE Stud Bolt | | | |
| AMMENDMENT | | Date - 02.08.2018 | DIMENSIONS ARE IN MILLIMETERS | | | Approved By Kapil Aggarwal CEO-MD |
| DETAILS | REVISION | DATE | APPROVED | ROLL FAST | STAINLESS STEEL BOLTS HIGH TENSILE BOLTS | KAPIL ENTERPRISES 330 EHTP, HSSIIDC, Kundli Industrial Estate Sonapat-Haryana-131028, Ph:9811009061 Email:-sales@bigboltnut.com, kapil@roll-fast.com |
| REMOVE SHARP EDGES & BURRS | SHEET SIZE A4 | SCALE NTS | | | | |