


DIN 912 / DIN EN ISO 4762

Socket head cap screw

- * Standard **DIN EN ISO 4762**
- * Threads **Metric**
- * Values **MM**

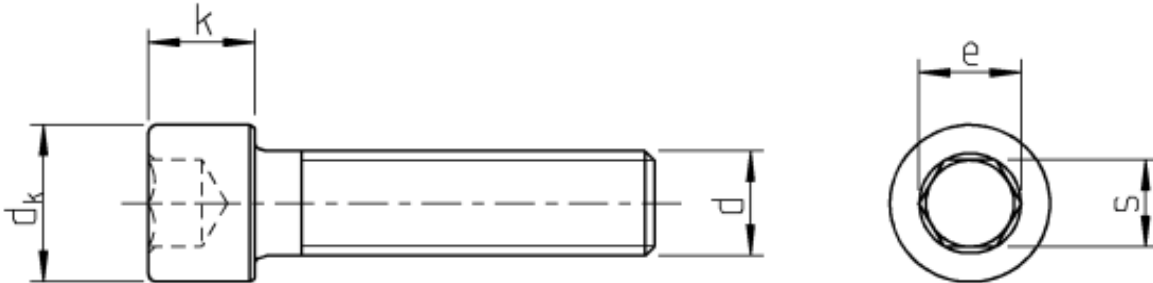

Finish Plain, Zinc plated (yellow, white, green, black passivated), Hot dip galvanised

d	Pitch	d	k	s	Thread length	socket depth	radius under head
M-20	2.50	30	20	17	52	10	0.80
M-22	2.50	33	22	17	56	11	0.80
M-24	3.00	36	24	19	60	12	0.80
M-27	3.00	40	27	19	66	13.5	1.00
M-30	3.50	45	30	22	72	15.5	1.00
M-33	3.50	50	33	24	78	18	1.00
M-36	4.00	54	36	27	84	19	1.00
M-39	4.00	-	-	-	-	-	-
M-42	4.50	63	42	32	96	24	1.20
M-45	5.00	-	-	-	-	-	-
M-48	5.00	72	48	36	108	28	1.60

Kapil Enterprises, 330 EHTP Kundli Industrial area, phase 5, Haryana (India)

Phone # T + 91 98110 09061, + 91 130 2119061

Web www.bigboltnut.com

Email sales@bigboltnut.com