


Note: This Drawing is the property of Kapil Enterprises-Kundli, and must not be copied or reproduced without permission or Written authorisation by Kapil Enterprises-Kundli

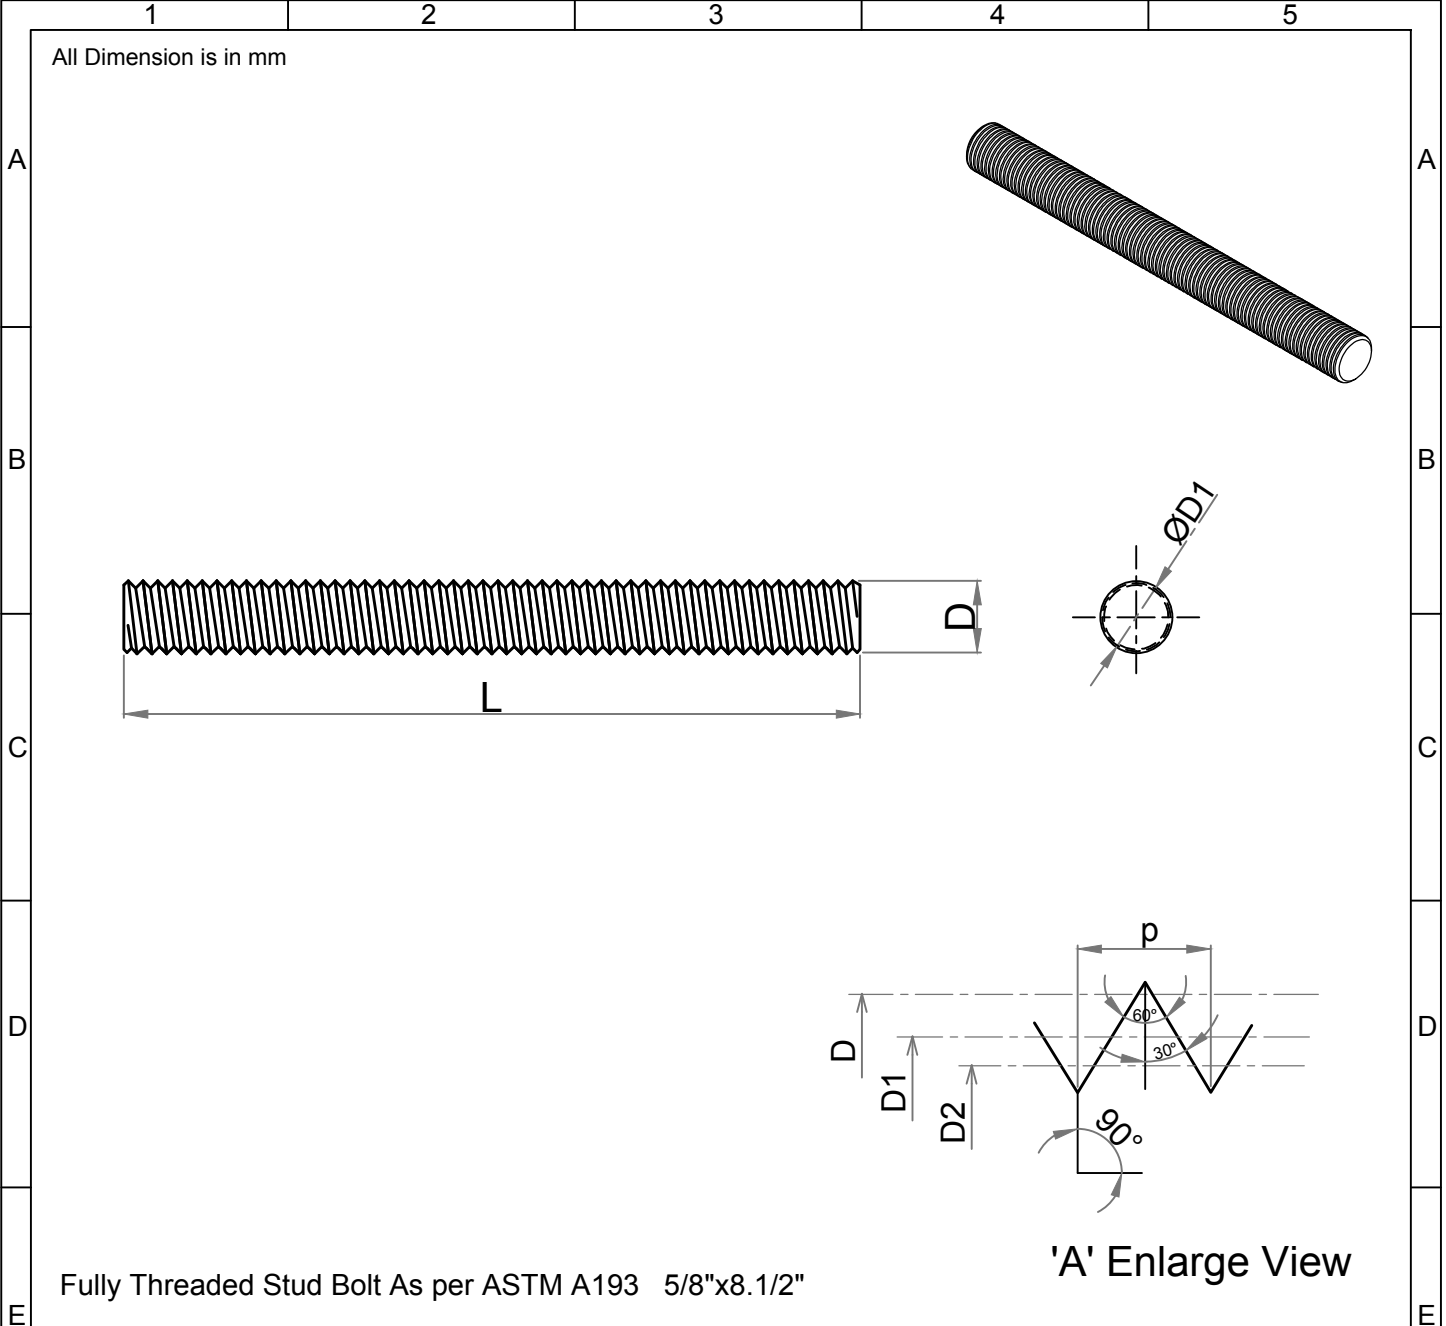

Fully Threaded Stud Bolt As per ASTM A193 5/8"x8.1/2"

'A' Enlarge View

| Parameters | Symbol | Minimum | Maximum | Drawing No.- KE-BASE-2200-00053-B18.1.1-A193-B7M-5/8x8.1/2 | | |
|------------------------|--------------|---------|---------------|---|--|--------------------------|
| | | | | Dimension as per | | B18.1.1 |
| Total Length | L | 215.90 | 218.90 | Chemical & Mechanical properties as per | | ASTM A193 |
| Threading Length | l | F.T | F.T | Grade | | B7M |
| Major diameter | D | 15.53 | 15.83 | Title | | Stud Bolt |
| Pitch diameter | D1 | 14.20 | 14.34 | Size | 5/8"x8.1/2" | Status- Approved |
| Minor diameter | D2 | 13.00 | - | Dated | 18.05.2018 | Proj. |
| Chamfer | u | 0.00 | 5.00 | Mass/Weight | 0.27857 kg/piece | |
| Thread per Inch | TPI | 11 UNC | | | | |
| Thread tolerance class | C | 2A | | | | |
| Amendment | | | | Drawn By | Checked By | Approved By |
| Details | Revision No. | Dated | Authorised by | Pankaj Kumar (Ass. QC Manager) | Santosh Kumar (Plant Head-GM) | Kapil Aggarwal CEO-MD |
| | | | | | Kapil Enterprises 330 EHTP, HSIIDC, Kundli Industrial Estate Sonapat - Haryana-131028, Ph:9811009061 Email:sales@bigboltnut.com, kapil@roll-fast.com | |
| | | | | | | |