
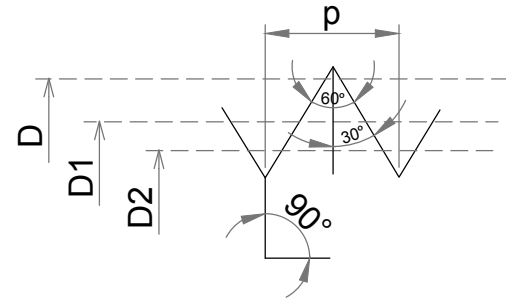


Parameters	Symbol	Minimum	Maximum
Total Length	L	215.90	218.90
Threading Length	l	F.T	F.T
Major diameter	D	34.3900	34.8700
Pitch diameter	D1	32.6200	32.8100
Minor diameter	D2	30.9700	-
Chamfer	u	0.00	7.00
Thread per Inch	TPI	8 UNC	

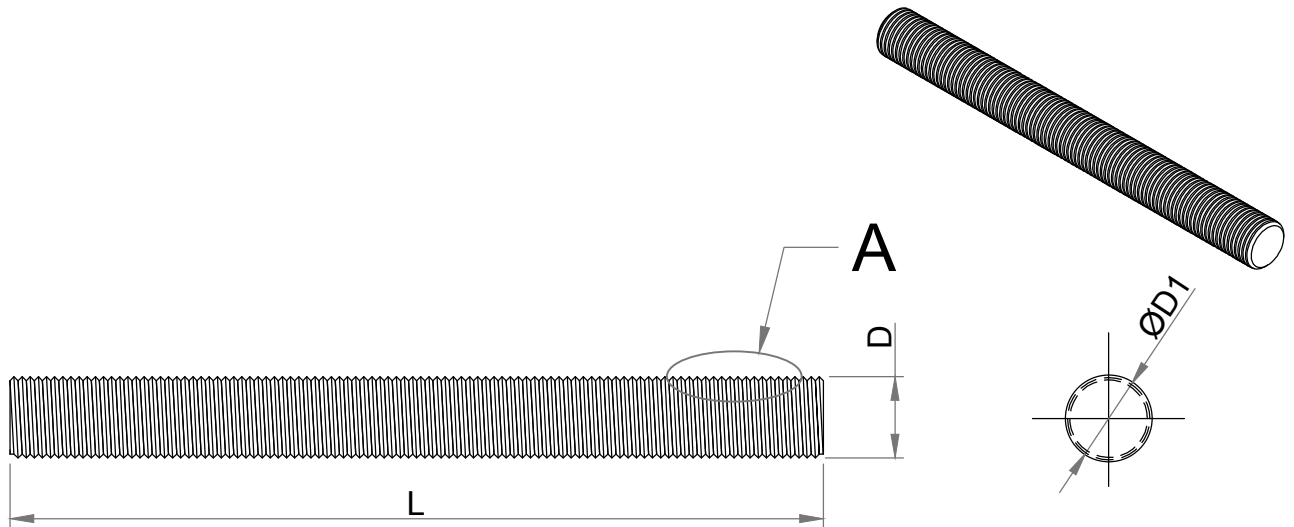

'A' Enlarge View

Dimension as per	B 18.1.1
Chemical & Mechanical properties as per	ASTM A193
Thread tolerance class (C)	2A
Grade	L43
Weight	1.36236 kg/piece

Drawing Number KE-BASE-2200-00207-B18.1.1-A193-L43-1.3/8x8.1/2		SIZE 1.3/8"x8.1/2"	TITLE Stud Bolt			
AMMENDMENT Date - 24.07.2018		DIMENSIONS ARE IN MILLIMETERS		Approved By Kapil Aggarwal CEO-MD	Drawn By Pankaj Kumar (Sr. QC Manager)	Checked By Approved By Santosh Kumar
DETAILS	REVISION	DATE	ROLL FAST STAINLESS STEEL BOLTS HIGH TENSILE BOLTS PRECISION TURNED COMPONENTS	KAPIL ENTERPRISES 330 EHTP, HSSIICD, Kundli Industrial Estate Sonapat-Haryana-131028, Ph:9811009061 Email:-sales@bigboltnut.com, kapil@roll-fast.com		
REMOVE SHARP EDGES & BURRS	SHEET SIZE A4	SCALE NTS				
Big Bolt Nut		APPROVED				
FASTENERS FOR WIND ENERGY ANCHOR BOLTS & FOUNDATION BOLTS						