

Note: This Drawing is the property of Kapil Enterprises-Kundli, and must not be copied or reproduced without permission or Written authorisation by Kapil Enterprises-Kundli

1 2 3 4 5

All Dimension is in mm

A A

B B





C C

D D

E E

F F

G G

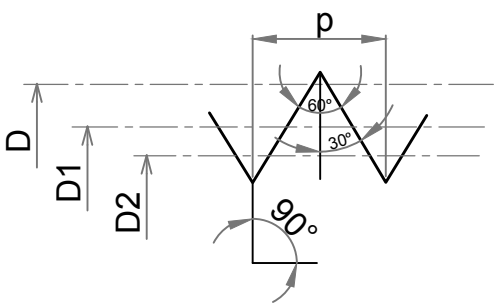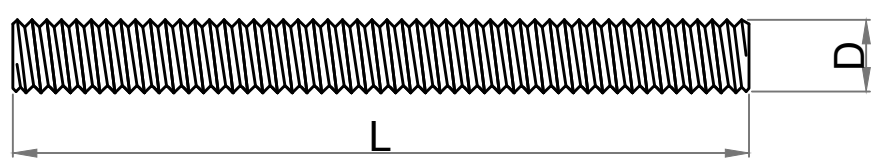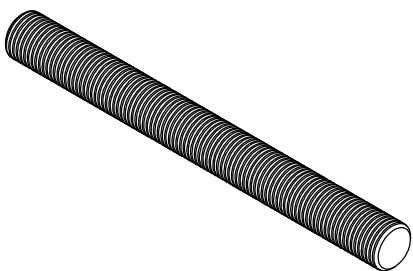

'A' Enlarge View

Fully Threaded Stud Bolt As per ASTM A193 7/8"x6"

Parameters	Symbol	Minimum	Maximum	Drawing No.- KE-BASE-2200-00100-B18.1.1-A193-B16-7/8x6		
				Dimension as per		B18.1.1
Total Length	L	152.40	155.40	Chemical & Mechanical properties as per		ASTM A193
Threading Length	I	F.T	F.T	Grade		B16
Major diameter	D	21.82	22.18	Title		Stud Bolt
Pitch diameter	D1	20.18	20.34	Size	7/8"x6"	Status- Approved
Minor diameter	D2	18.71	-	Dated	07.06.2018	Proj.
Chamfer	u	0.00	5.00	Mass/Weight	0.38777 kg/piece	
Thread per Inch	TPI	9 UNC				
Thread tolerance class	C	2A				
Amendment				Drawn By	Checked By	Approved By
Details	Revision No.	Dated	Authorised by	Pankaj Kumar (Ass. QC Manager)	Santosh Kumar (Plant Head-GM)	Kapil Aggarwal CEO-MD
					Kapil Enterprises 330 EHTP, HSIIDC, Kundli Industrial Estate Sonapat - Haryana-131028, Ph:9811009061 Email:sales@bigboltnut.com, kapil@roll-fast.com	

1 2 3 4 5