



A B C D E F

Parameters	Symbol	Minimum	Maximum
Total Length	L	127.00	130.00
Threading Length	l	F.T	F.T
Major diameter	D	37.66	38.04
Pitch diameter	D1	35.80	35.98
Minor diameter	D2	34.15	-
Chamfer	u	0.00	8.00
Thread per Inch	TPI	8 UNC	

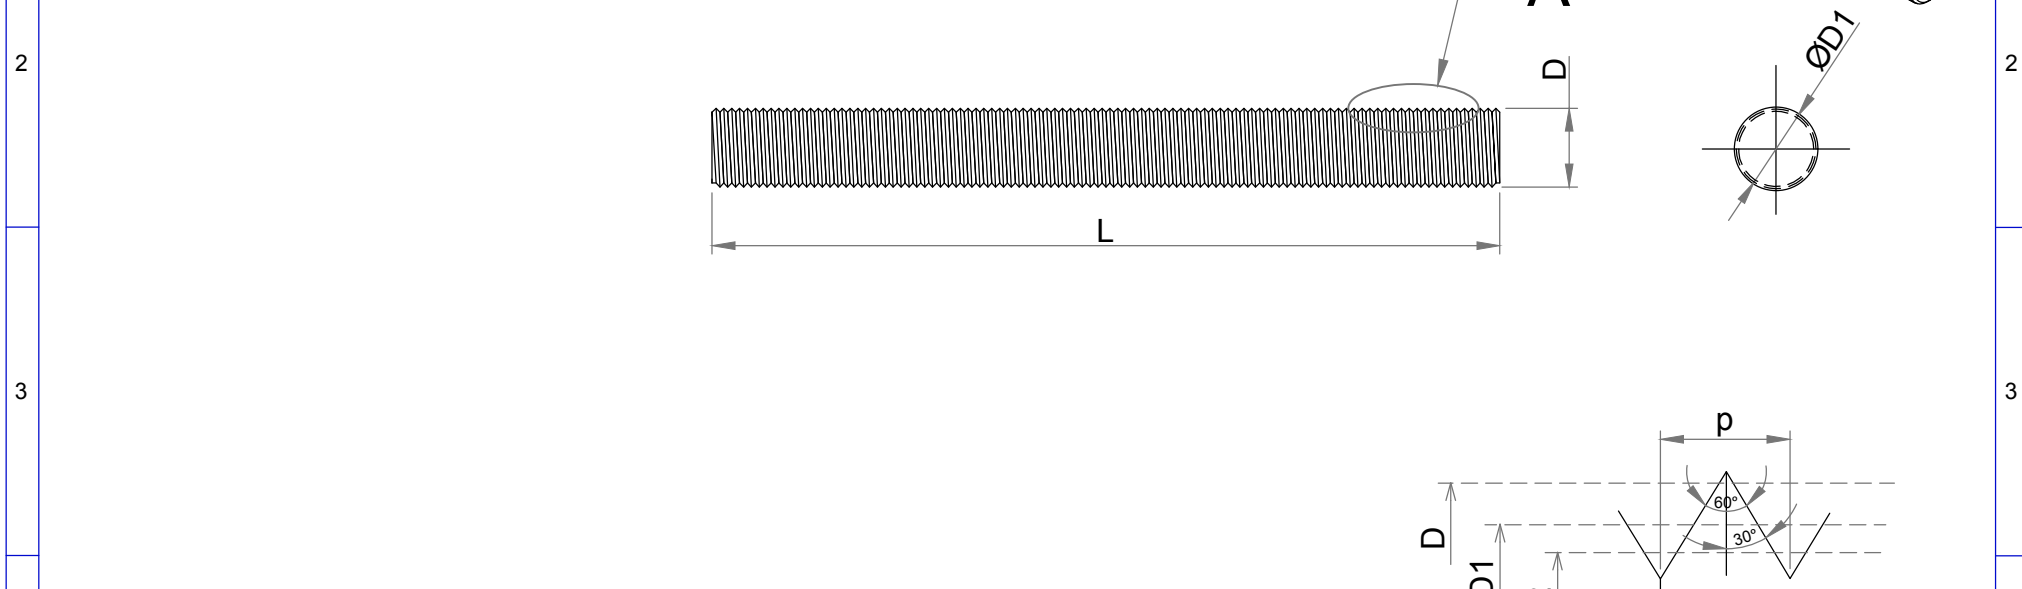

Dimension as per	B 18.1.1
Chemical & Mechanical properties as per	ASTM A193
Thread tolerance class (C)	2A
Grade	B7M
Weight	0.97521 kg/piece

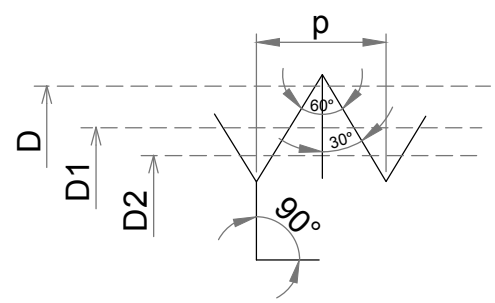

Drawing Number KE-BASE-2200-00221-B18.1.1-A193-B7M-1.1/2x5		SIZE 1.1/2"x5"	TITLE Stud Bolt			
AMMENDMENT		Date - 02.08.2018	DIMENSIONS ARE IN MILLIMETERS			Approved By Kapil Aggarwal CEO-MD
DETAILS	REVISION	DATE	APPROVED	ROLL FAST STAINLESS STEEL BOLTS HIGH TENSILE BOLTS PRECISION TURNED COMPONENTS		
REMOVE SHARP EDGES & BURRS	SHEET SIZE A4	SCALE NTS				
FASTENERS FOR WIND ENERGY ANCHOR BOLTS & FOUNDATION BOLTS		KAPIL ENTERPRISES 330 EHTP, HSSIIDC, Kundli Industrial Estate Sonapat-Haryana-131028, Ph:9811009061 Email:-sales@bigboltnut.com, kapil@roll-fast.com			Drawn By Pankaj Kumar (Sr. QC Manager)	Checked BY Approved By Santosh Kumar

A B C D E F