


Note: This Drawing is the property of Kapil Enterprises-Kundli, and must not be copied or reproduced without permission or Written authorisation by Kapil Enterprises-Kundli

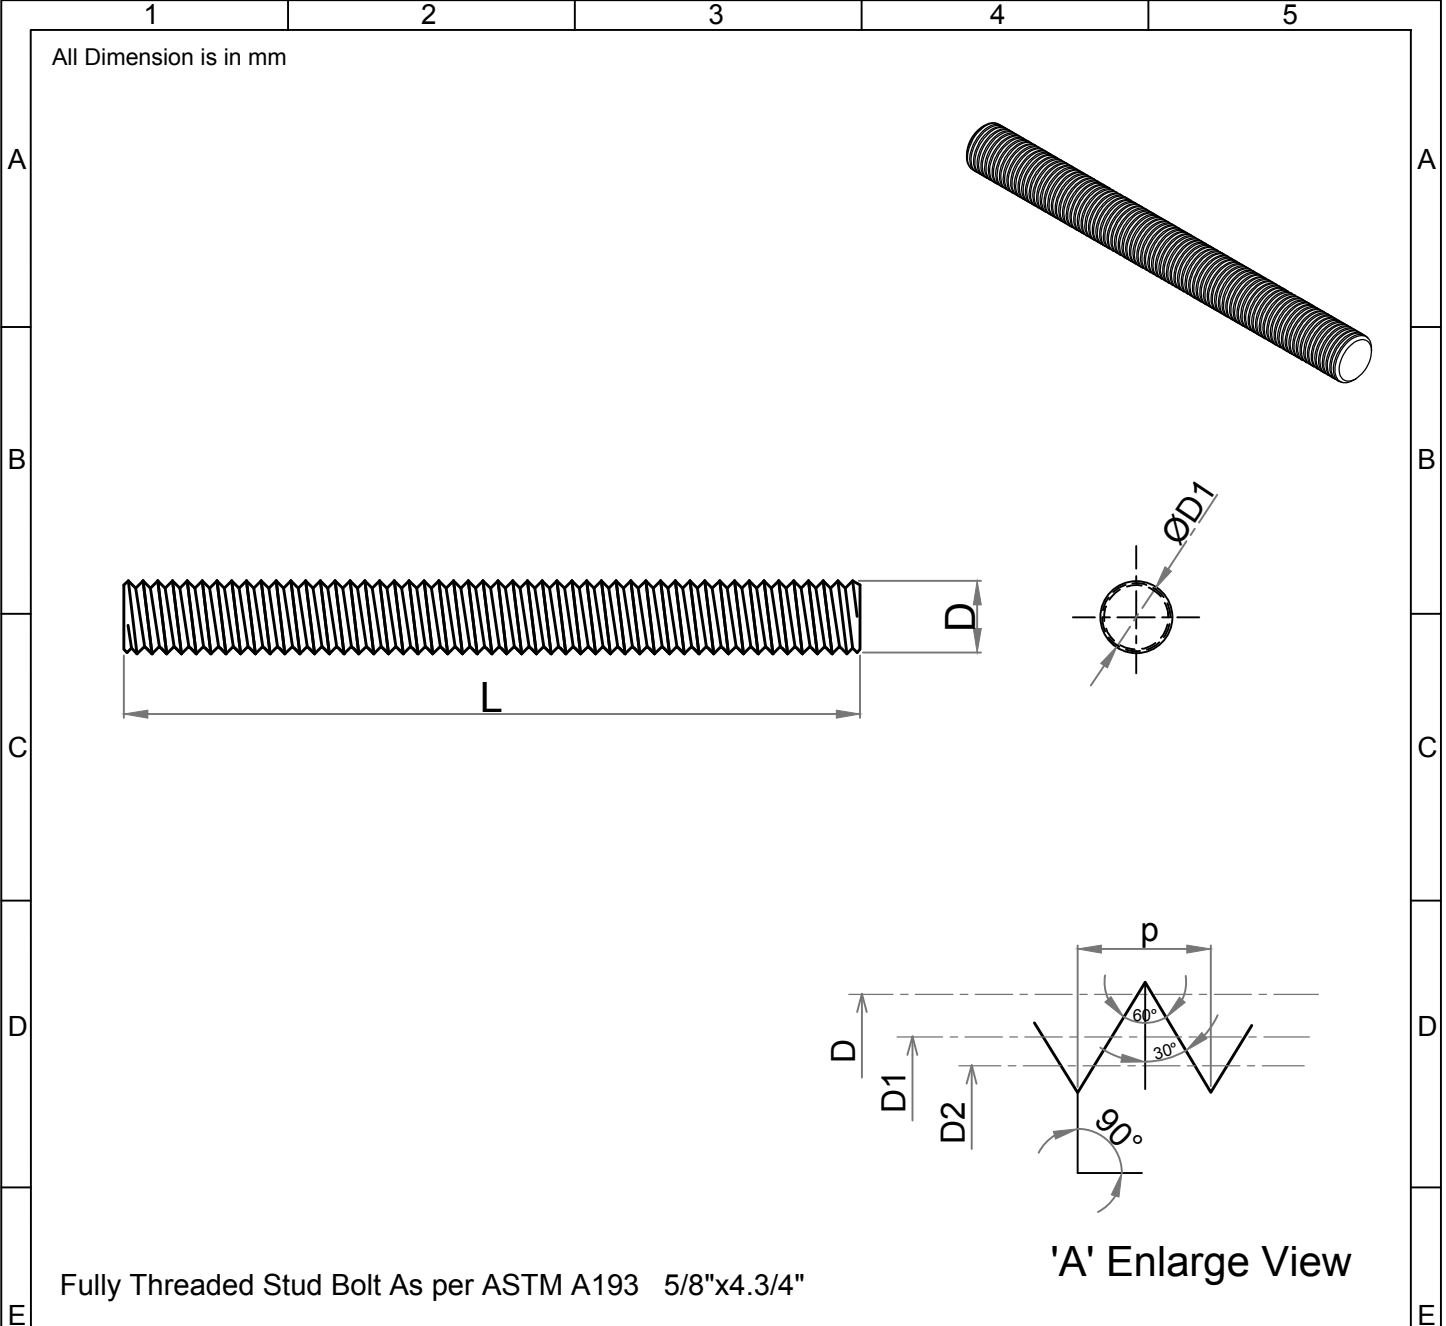

Fully Threaded Stud Bolt As per ASTM A193 5/8"x4.3/4"

| Parameters | Symbol | Minimum | Maximum | Drawing No.- KE-BASE-2200-00041-B18.1.1-A193-B8-5/8x4.3/4 | |
|------------------------|--------------|---------|---------------|--|---|
| | | | | Dimension as per B18.1.1 | |
| Total Length | L | 120.65 | 123.65 | Chemical & Mechanical properties as per ASTM A193 | |
| Threading Length | I | F.T | F.T | Grade B8 | |
| Major diameter | D | 15.53 | 15.83 | Title Stud Bolt | |
| Pitch diameter | D1 | 14.20 | 14.34 | Size | 5/8"x4.3/4" Status- Approved |
| Minor diameter | D2 | 13.00 | - | Dated | 18.05.2018 Proj. |
| Chamfer | u | 0.00 | 5.00 | Mass/Weight | 0.15567 kg/piece |
| Thread per Inch | TPI | 11 UNC | | Drawn By Pankaj Kumar (Ass. QC Manager) | Checked By Santosh Kumar (Plant Head-GM) |
| Thread tolerance class | C | 2A | | | |
| Amendment | | | | Kapil Enterprises 330 EHTP, HSIIDC, Kundli Industrial Estate Sonapat - Haryana-131028, Ph:9811009061 Email:sales@bigboltnut.com, kapil@roll-fast.com | |
| Details | Revision No. | Dated | Authorised by | | |
| | | | | | |
| | | | | | |
| | | | | | |