



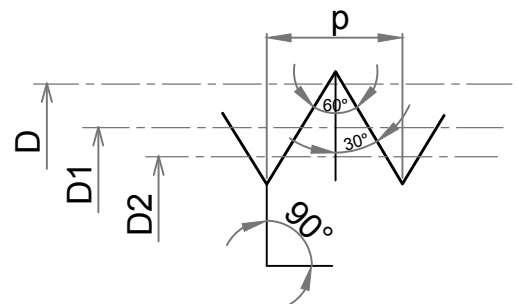



Note: This Drawing is the property of Kapil Enterprises-Kundli, and must not be copied or reproduced without permission or Written authorisation by Kapil Enterprises-Kundli

All Dimension is in mm

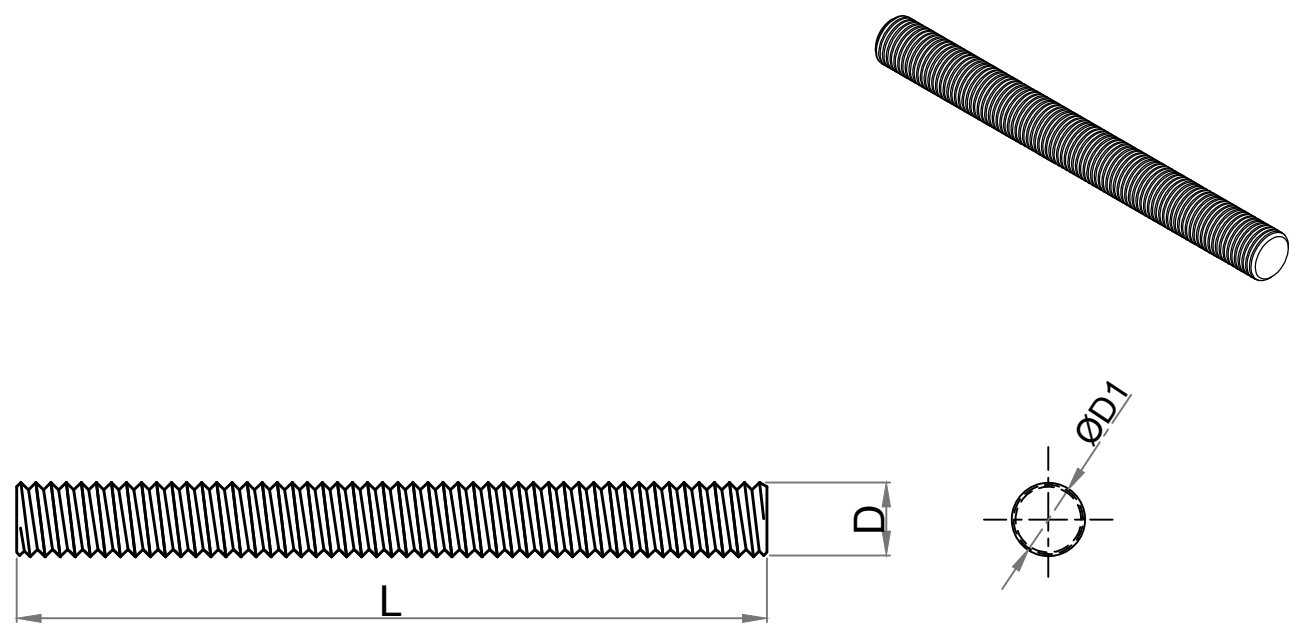

'A' Enlarge View

Fully Threaded Stud Bolt As per ASTM A193 1"x11"

| Parameters | Symbol | Minimum | Maximum | Drawing No.- KE-BASE-2200-00137-B18.1.1-A193-B8T-1x11 | |
|------------------------|--------------|---------|---------------|---|------------------|
| | | | | Dimension as per | B18.1.1 |
| Total Length | L | 279.40 | 282.40 | Chemical & Mechanical properties as per | ASTM A193 |
| Threading Length | l | F.T | F.T | Grade | B8T |
| Major diameter | D | 24.96 | 25.35 | Title | Stud Bolt |
| Pitch diameter | D1 | 23.11 | 23.29 | Size | 1"x11" |
| Minor diameter | D2 | 21.45 | - | Dated | 13.06.2018 |
| Chamfer | u | 0.00 | 6.00 | Mass/Weight | 0.93953 kg/piece |
| Thread per Inch | TPI | 8 UNC | | <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  Drawn By Pankaj Kumar (Ass. QC Manager) </div> <div style="text-align: center;">  Checked By Santosh Kumar (Plant Head-GM) </div> <div style="text-align: center;">  Approved By Kapil Aggarwal CEO-MD </div> </div> | |
| Thread tolerance class | C | 2A | | | |
| Amendment | | | |  Kapil Enterprises 330 EHTP, HSIIDC, Kundli Industrial Estate Sonapat - Haryana-131028, Ph:9811009061 Email:sales@bigboltnut.com, kapil@roll-fast.com | |
| Details | Revision No. | Dated | Authorised by | | |
| | | | | | |
| | | | | | |