



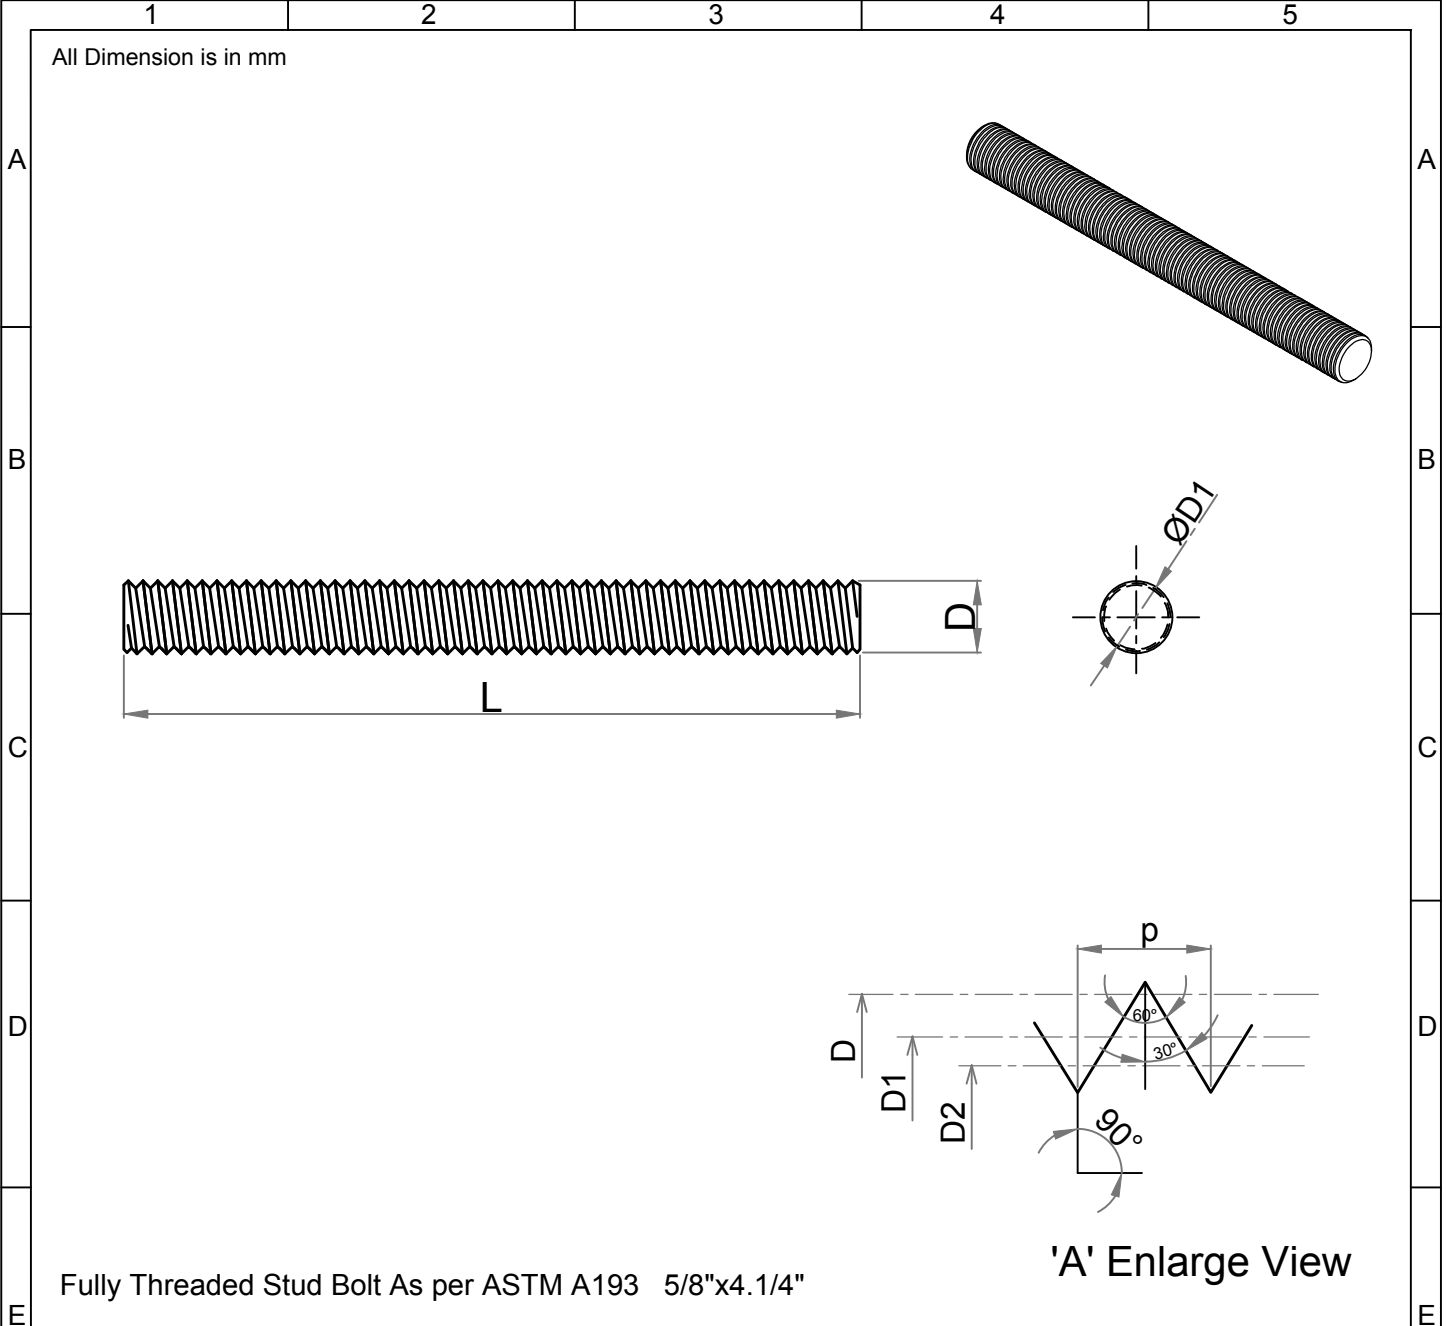


Note: This Drawing is the property of Kapil Enterprises-Kundli, and must not be copied or reproduced without permission or Written authorisation by Kapil Enterprises-Kundli



Fully Threaded Stud Bolt As per ASTM A193 5/8"x4.1/4"

'A' Enlarge View

Parameters	Symbol	Minimum	Maximum	Drawing No.- KE-BASE-2200-00039-B18.1.1-A193-L43-5/8x4.1/4		
				Dimension as per		B18.1.1
Total Length	L	107.95	110.95	Chemical & Mechanical properties as per		ASTM A193
Threading Length	I	F.T	F.T	Grade		L43
Major diameter	D	15.53	15.83	Title		Stud Bolt
Pitch diameter	D1	14.20	14.34	Size		5/8"x4.1/4"
Minor diameter	D2	13.00	-	Dated		18.05.2018
Chamfer	u	0.00	5.00	Mass/Weight		0.13928 kg/piece
Thread per Inch	TPI	11 UNC		<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  Drawn By Pankaj Kumar (Ass. QC Manager) </div> <div style="text-align: center;">  Checked By Santosh Kumar (Plant Head-GM) </div> <div style="text-align: center;">  Approved By Kapil Aggarwal CEO-MD </div> </div>		
Thread tolerance class	C	2A				
Amendment				<div style="display: flex; justify-content: space-between;"> <div style="text-align: center;">  </div> <div style="text-align: center;"> Kapil Enterprises 330 EHTP, HSIIDC, Kundli Industrial Estate Sonapat - Haryana-131028, Ph:9811009061 Email:sales@bigboltnut.com, kapil@roll-fast.com </div> </div>		
Details	Revision No.	Dated	Authorised by			