



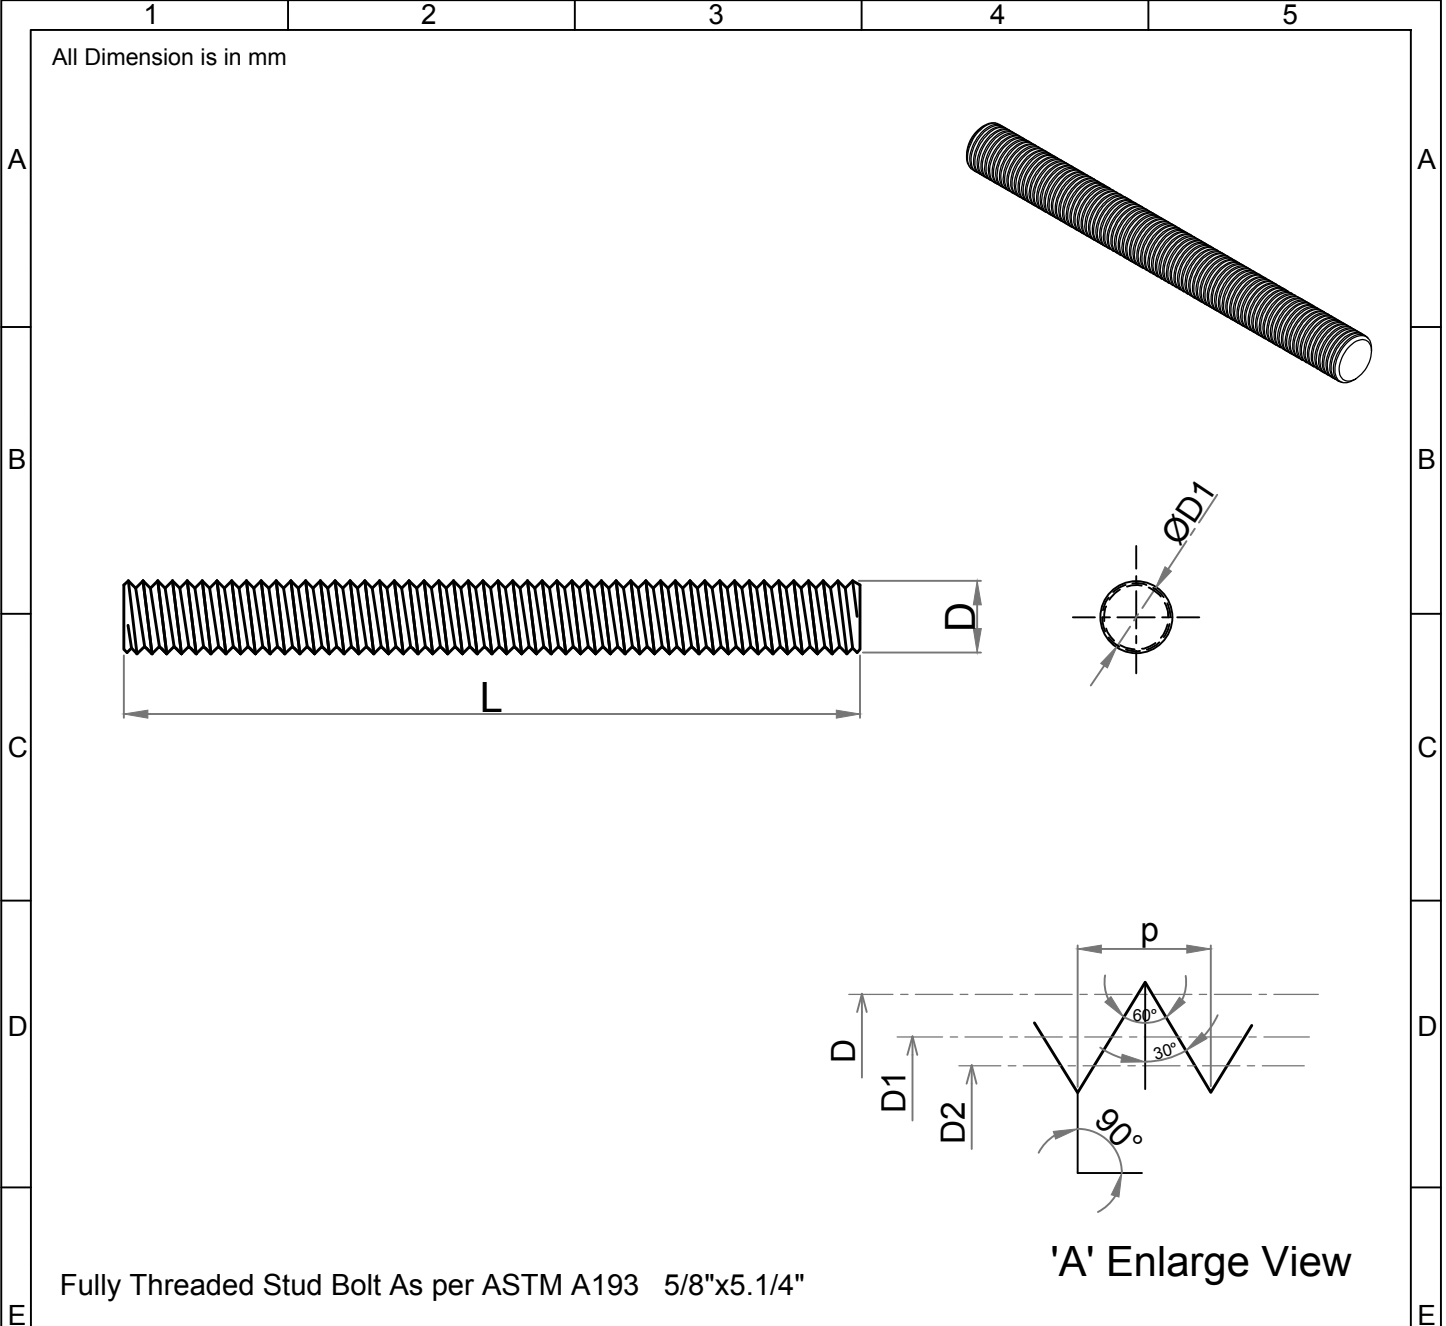


Note: This Drawing is the property of Kapil Enterprises-Kundli, and must not be copied or reproduced without permission or Written authorisation by Kapil Enterprises-Kundli



Fully Threaded Stud Bolt As per ASTM A193 5/8"x5.1/4"

'A' Enlarge View

| Parameters | Symbol | Minimum | Maximum | Drawing No.- KE-BASE-2200-00043-B18.1.1-A193-L43-5/8x5.1/4 | | |
|------------------------|--------------|---------|---------------|--|--|------------------|
| | | | | Dimension as per | | B18.1.1 |
| Total Length | L | 133.35 | 136.35 | Chemical & Mechanical properties as per | | ASTM A193 |
| Threading Length | I | F.T | F.T | Grade | | L43 |
| Major diameter | D | 15.53 | 15.83 | Title | | Stud Bolt |
| Pitch diameter | D1 | 14.20 | 14.34 | Size | | 5/8"x5.1/4" |
| Minor diameter | D2 | 13.00 | - | Dated | | 18.05.2018 |
| Chamfer | u | 0.00 | 5.00 | Mass/Weight | | 0.17206 kg/piece |
| Thread per Inch | TPI | 11 UNC | | <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  Drawn By Pankaj Kumar (Ass. QC Manager) </div> <div style="text-align: center;">  Checked By Santosh Kumar (Plant Head-GM) </div> <div style="text-align: center;">  Approved By Kapil Aggarwal CEO-MD </div> </div> | | |
| Thread tolerance class | C | 2A | | | | |
| Amendment | | | |  Kapil Enterprises 330 EHTP, HSIIDC, Kundli Industrial Estate Sonapat - Haryana-131028, Ph:9811009061 Email:sales@bigboltnut.com, kapil@roll-fast.com | | |
| Details | Revision No. | Dated | Authorised by | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |