Parameters	Symbol	Minimum	Maximum
Total Length	L	120.65	123.65
Threading Length	l	F.T	F.T
Major diameter	D	63.06	63.44
Pitch diameter	D1	61.16	61.36
Minor diameter	D2	59.54	-
Chamfer	u	0.00	12.00
Thread per Inch	TPI	8 UNC	

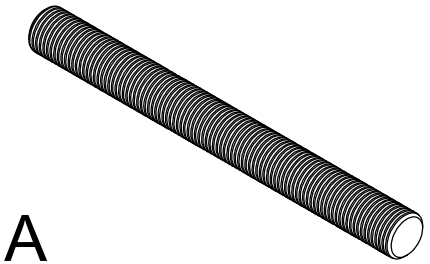

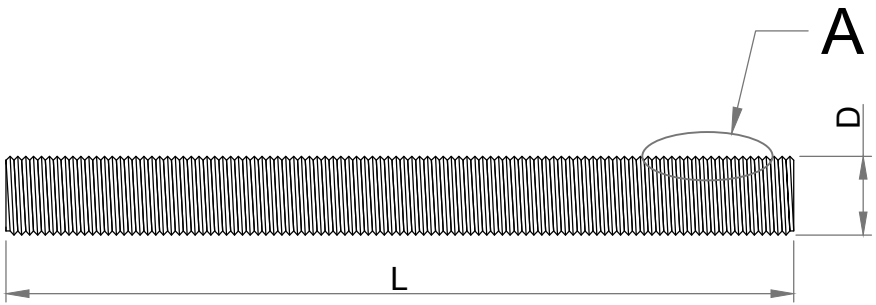



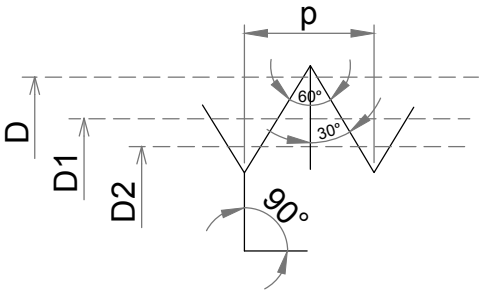

'A' Enlarge View

Dimension as per	B 18.1.1
Chemical & Mechanical properties as per	ASTM A193
Thread tolerance class (C)	2A
Grade	L43
Weight	2.60385 kg/piece

Drawing Number: KE-BASE-2200-00345-B18.1.1-A193-L43-2.1/2x4.3/4

SIZE: 2.1/2"x4.3/4"

TITLE: Stud Bolt

AMMENDMENT		
DETAILS	REVISION	DATE

Date - 02.08.2018

DIMENSIONS ARE IN MILLIMETERS

Approved By Kapil Aggarwal CEO-MD

Drawn By Pankaj Kumar (Sr. QC Manager)

Checked BY Approved By Santosh Kumar

REMOVE SHARP EDGES & BURRS

SHEET SIZE: A4

SCALE: NTS

Big Bolt Nut

FASTENERS FOR WIND ENERGY

ANCHOR BOLTS & FOUNDATION BOLTS

APPROVED

ROLL FAST

STAINLESS STEEL BOLTS
HIGH TENSILE BOLTS
PRECISION TURNED COMPONENTS

KAPIL ENTERPRISES
330 EHTP, HSSIIDC, Kundli Industrial Estate
Sonepat-Haryana-131028, Ph:9811009061
Email:-sales@bigboltnut.com, kapil@roll-fast.com