


A B C D E F

Parameters	Symbol	Minimum	Maximum
Total Length	L	101.60	104.60
Threading Length	l	F.T	F.T
Major diameter	D	69.4100	69.7800
Pitch diameter	D1	67.5100	67.7200
Minor diameter	D2	65.8900	-
Chamfer	u	0.00	13.0000
Thread per Inch	TPI	8 UNC	


1

1

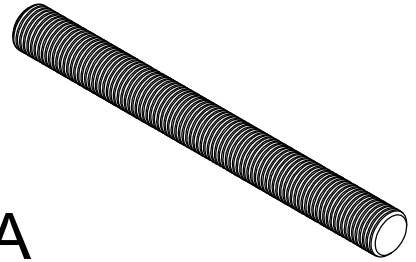


2

2

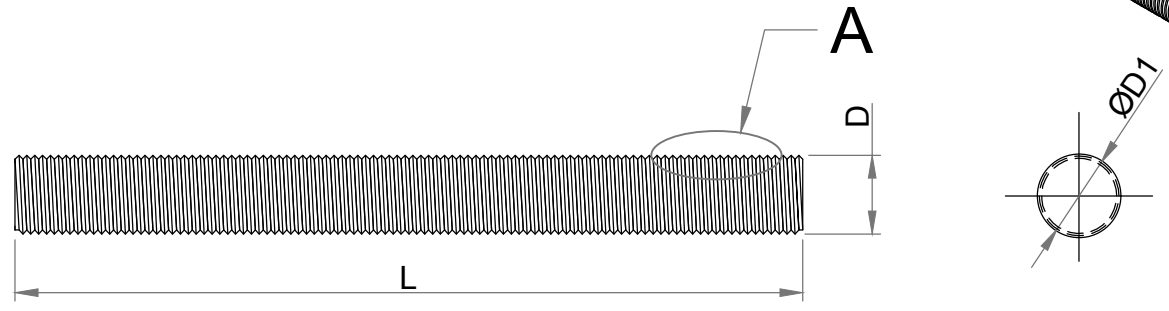

3

3

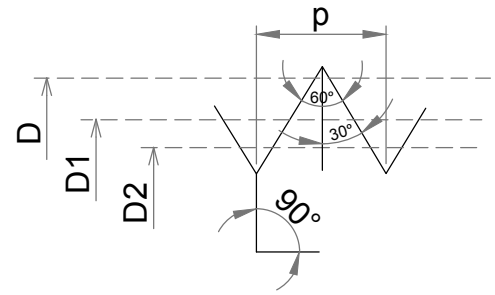

'A' Enlarge View

Dimension as per	B 18.1.1
Chemical & Mechanical properties as per	ASTM A193
Thread tolerance class (C)	2A
Grade	L43
Weight	2.68606 kg/piece

4

4

Drawing Number KE-BASE-2200-00367-B18.1.1-A193-L43-2.3/4x4			SIZE 2.3/4"x4"	TITLE Stud Bolt			
AMMENDMENT			Date - 02.08.2018	DIMENSIONS ARE IN MILLIMETERS			Approved By Kapil Aggarwal CEO-MD
DETAILS	REVISION	DATE	Big Bolt Nut	APPROVED	ROLL FAST	STAINLESS STEEL BOLTS HIGH TENSILE BOLTS	Drawn By Pankaj Kumar (Sr. QC Manager)
REMOVE SHARP EDGES & BURRS	SHEET SIZE A4	SCALE NTS					Checked BY Approved By Santosh Kumar
FASTENERS FOR WIND ENERGY ANCHOR BOLTS & FOUNDATION BOLTS			PRECISION TURNED COMPONENTS			KAPIL ENTERPRISES 330 EHTP, HSSIIDC, Kundli Industrial Estate Sonapat-Haryana-131028, Ph:9811009061 Email:-sales@bigboltnut.com, kapil@roll-fast.com	

5

5

A B C D E F